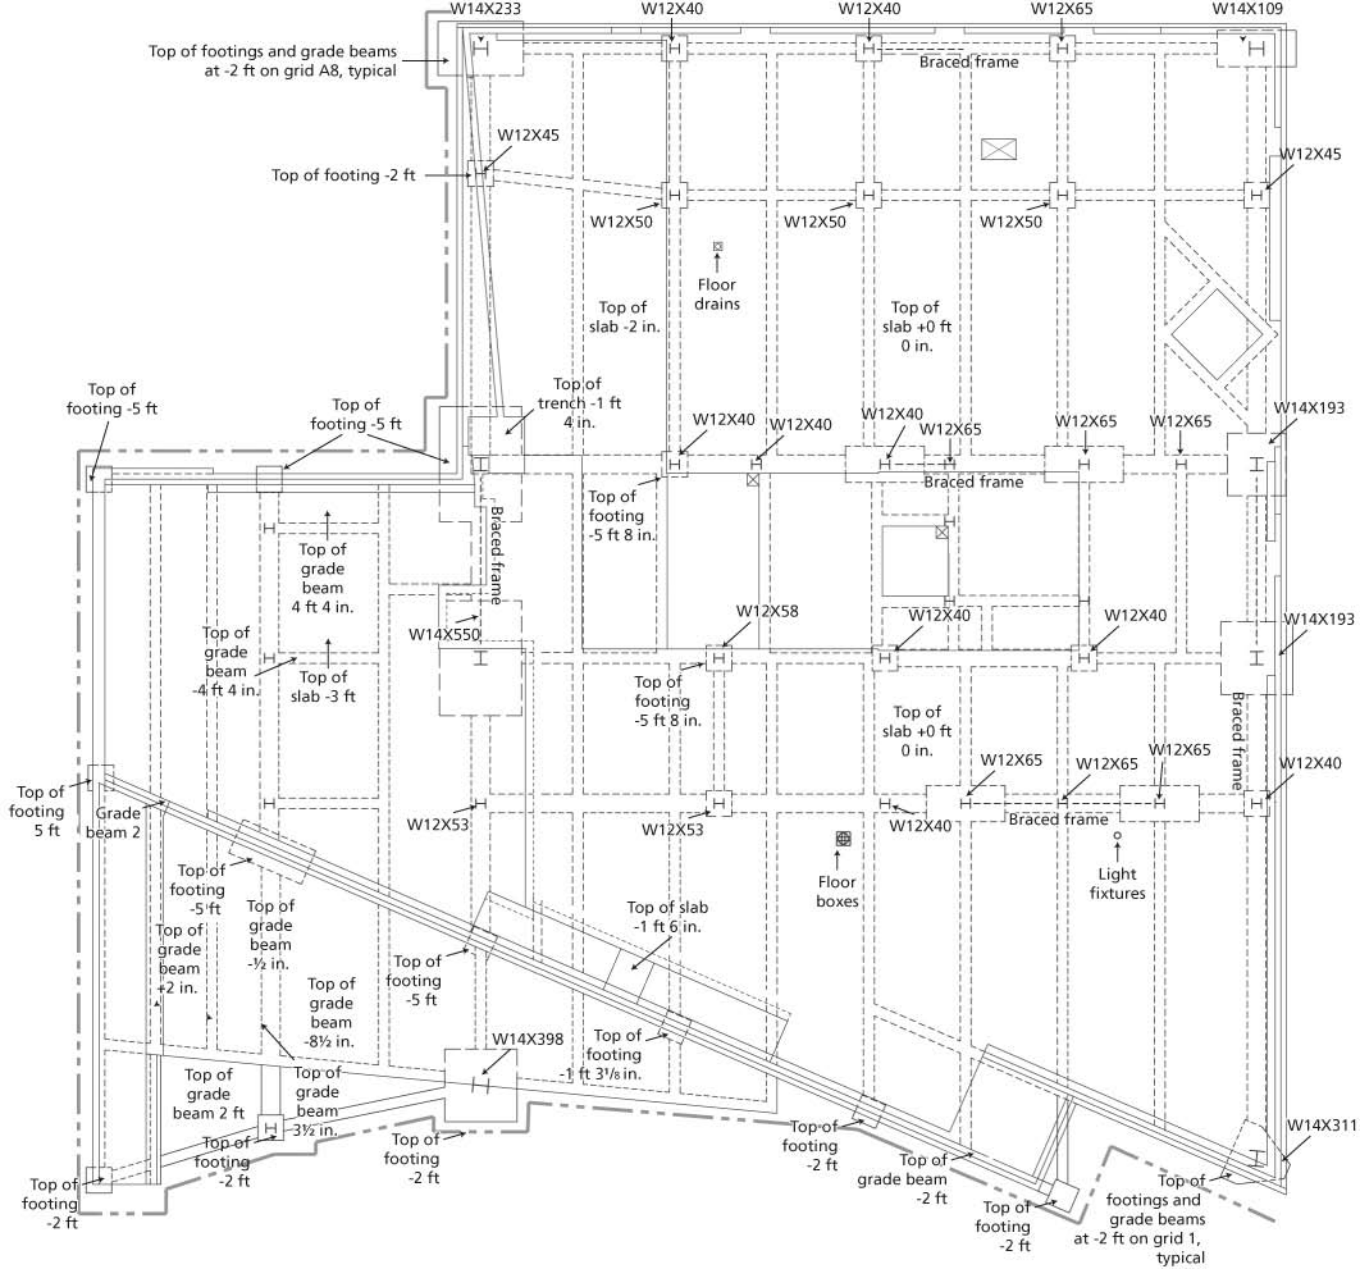
W14X233
W12X40
W12X40
W12X65
W14X109
Top of footings and grade beams at -2 ft on grid A8, typical
Braced frame
W12X45
Top of footing -2 ft
W12X45
W12X50
W12X50
W12X50
Floor drains
Top of slab -2 in.
Top of slab +0 ft 0 in.
Top of footing -5 ft
Top of footing -5 ft
Top of trench -1 ft 4 in.
W12X40
W12X40
W12X40
W12X65
W12X65
W12X65
W14X193
Braced frame
Top of footing -5 ft 8 in.
Braced frame
Top of grade beam 4 ft 4 in.
W14X550
W12X58
W12X40
W12X40
W14X193
Top of grade beam -4 ft 4 in.
Top of slab -3 ft
Top of footing -5 ft 8 in.
Top of slab +0 ft 0 in.
Braced frame
W12X65
W12X65
W12X65
W12X40
Top of footing 5 ft
Grade beam 2
W12X53
W12X53
W12X40
Braced frame
Floor boxes
Light fixtures
Top of footing -5 ft
Top of grade beam +2 in.
Top of grade beam -½ in.
Top of footing -5 ft
Top of slab -1 ft 6 in.
Top of grade beam -8½ in.
W14X398
Top of footing -1 ft 3⅛ in.
Top of grade beam 2 ft
Top of grade beam 3½ in.
Top of footing -2 ft
Top of footing -2 ft
Top of footing -2 ft
Top of footing -2 ft
Top of grade beam -2 ft
Top of footing -2 ft
W14X311
Top of footings and grade beams at -2 ft on grid 1, typical